

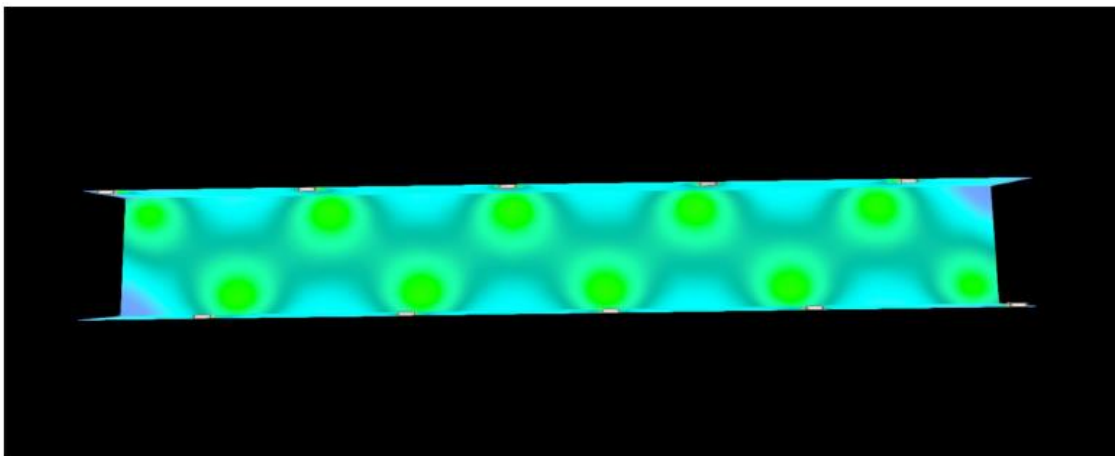


Plan sytuacyjny opraw oświetleniowych

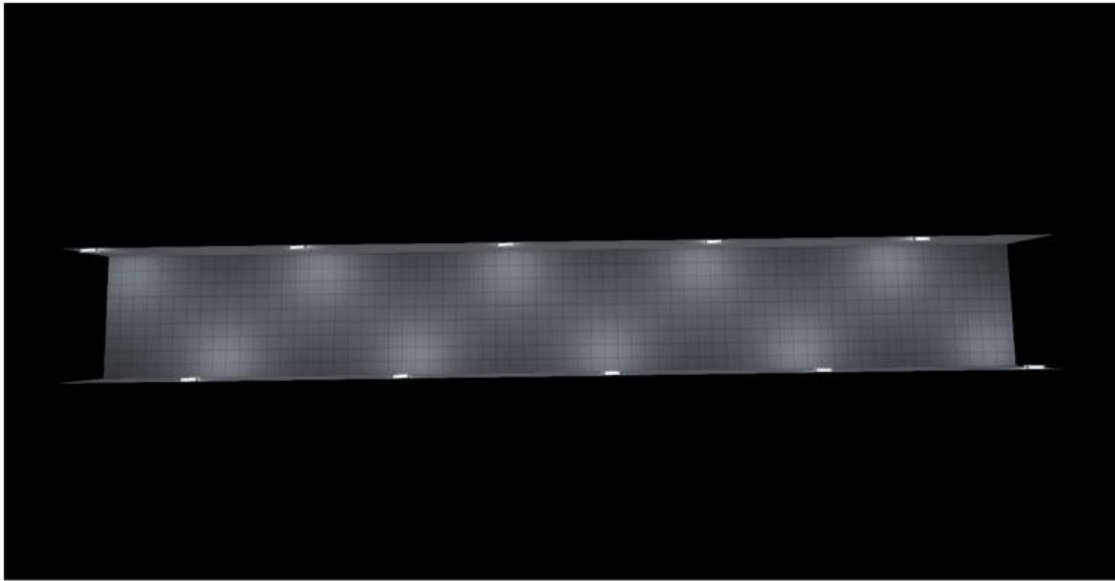

X	Y	Wysokość montażu	Obrót obudowy	MF	Oprawa
0.875 m	5.365 m	2.450 m	0.0° / -0.0° / -90.0°	0.80	1
9.375 m	5.365 m	2.450 m	0.0° / -0.0° / -90.0°	0.80	2
17.875 m	5.365 m	2.450 m	0.0° / -0.0° / -90.0°	0.80	3
26.375 m	5.365 m	2.450 m	0.0° / -0.0° / -90.0°	0.80	4
34.875 m	5.365 m	2.450 m	0.0° / -0.0° / -90.0°	0.80	5
5.125 m	0.085 m	2.450 m	0.0° / -0.0° / 90.0°	0.80	6
13.625 m	0.085 m	2.450 m	0.0° / -0.0° / 90.0°	0.80	7
22.125 m	0.085 m	2.450 m	0.0° / -0.0° / 90.0°	0.80	8
30.625 m	0.085 m	2.450 m	0.0° / -0.0° / 90.0°	0.80	9
39.125 m	0.085 m	2.450 m	0.0° / -0.0° / 90.0°	0.80	10