


UPML 25-95 180 AUTO, 1 x 230 V, 50/60 Hz

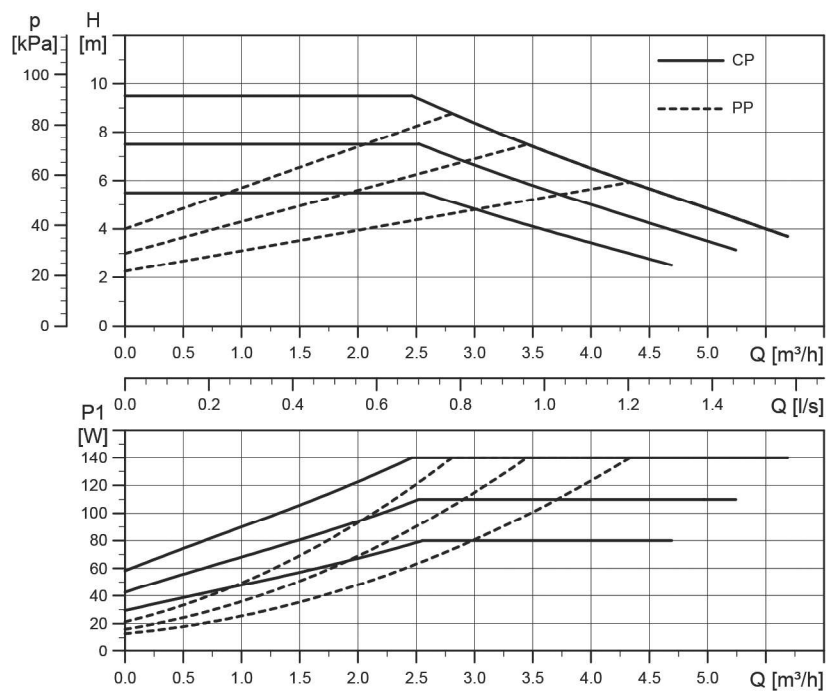


EEI ≤ 0.23

Electrical data, 1 x 230 V, 50 Hz

Speed	P ₁ [W]	I _{1/1} [A]
Min.	12	0.1
Max.	140	1.1

Dimensional sketches and control box positions

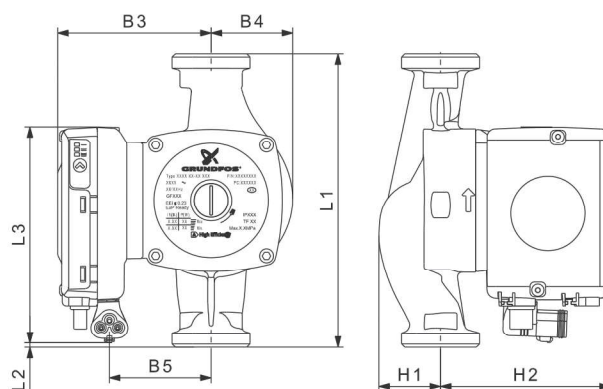

Pump type	Dimensions [mm]								Connection	Net weight [kg]	Quantity per pallet
	L1	L2	L3	B3	B4	B5	H1	H2			
UPML 25-95	180	3.5	131	95	50	64	38	104	G 1 1/2	2.5	-

Technical data

System pressure:	Max. 1.0 MPa (10 bar)	Enclosure class:	IPX2D
Minimum inlet pressure:	0.01 MPa (0.10 bar) at 95 °C liquid temperature	Insulation class:	H
Liquid temperature:	-10 °C to +95 °C (TF 95)	Equipment class:	I
Motor protection:	Overload protection	Approval and marking:	VDE, CE

TM05 7960 1713

TM05 7427 3312